

Hi Geoff

Happy to help if I can.

Haven't used Secwin.

I do something similar but I don't use multi-proj for IP and Single User TPS. I use a compile definition and set a global variable. (I use the compile definition in other areas where it might cause problems).

I created the ip driver version and then once happy with how everything runs I copy the app to (say RohansIP.app) from RohansIP.app to RohansSU.app

In the global settings I change my variable to = 1 , and deselect the enable IP driver option. In the project files I have different exes defined (I also use different output folders).

Works well and by setting the compile defines in the main app file I only ever have to copy to the single user and set the vars when updating the app for the clients.

I have used Multi-proj for TPS/SQL versions and it works rather well.

Hope this helps.

Regards

Rohan

Image 1 = Setting global var

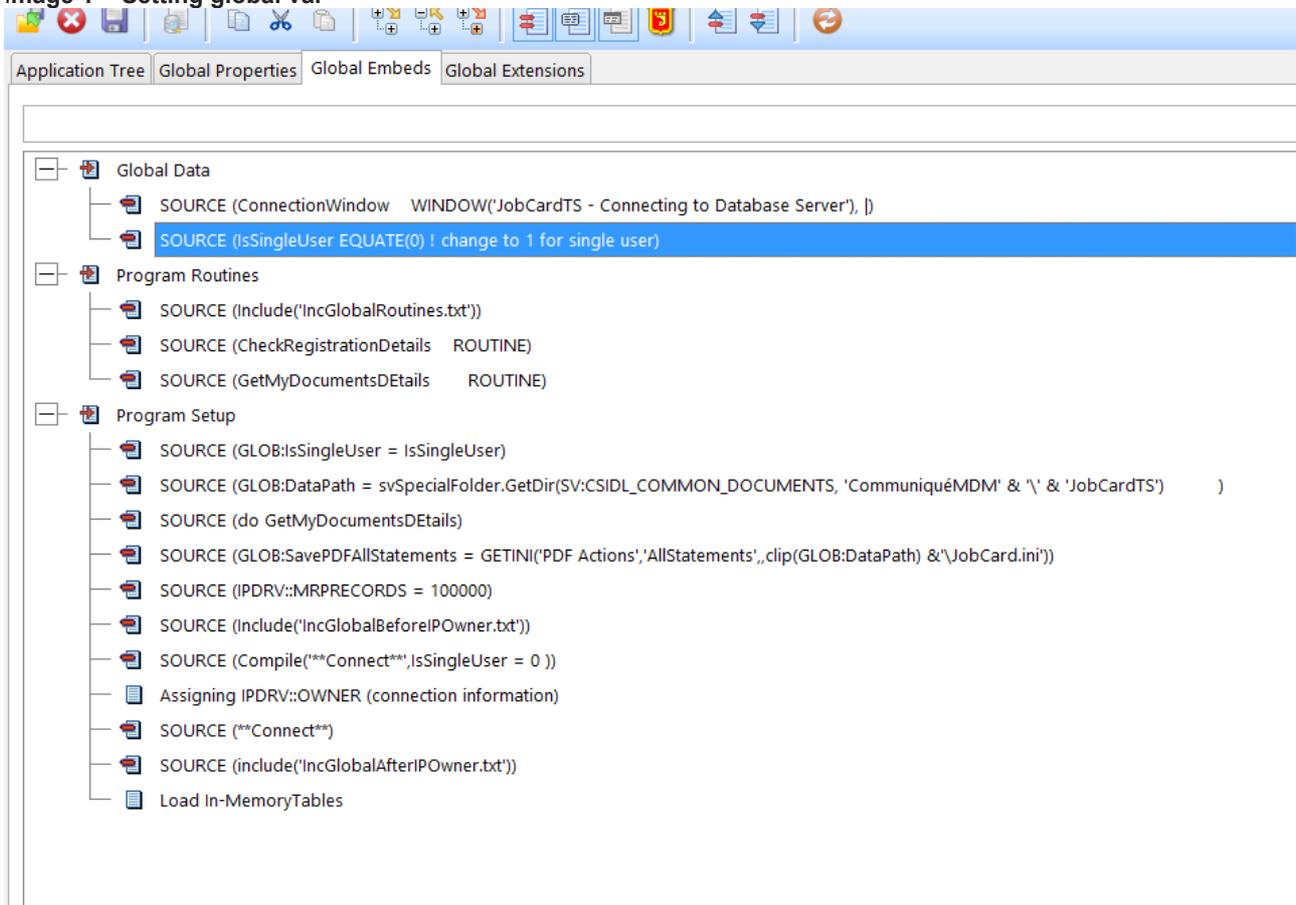


image 2 = Deselecting Enable Ip driver

